


trak | bloc


BATTERY	Maintenance-free AGM bloc
MODEL	12TB60
CAPACITY (C5)	62 Ah
CAPACITY (C20)	70 Ah
CASE MATERIAL	Polypropylene (PP)
PROTECTION CLASS	IP 25
CYCLE LIFE	Up to 1000 cycles at 30°C / 80% DoD
FLAME RETARDANT RATING	UL94 HB

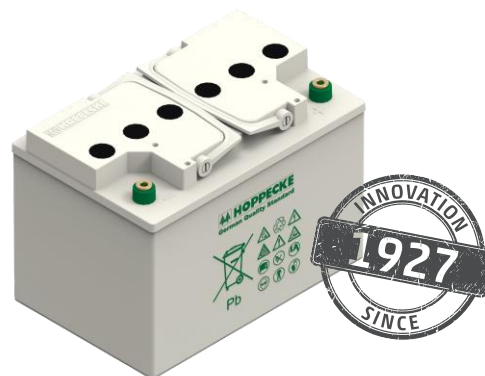

PHYSICAL SPECIFICATIONS		
WEIGHT	50.71 lbs.	23 kg
LENGTH	10.51"	267 mm
WIDTH	7.01"	178 mm
HEIGHT	7.48"	190 mm
TERMINAL TYPE	M8 / M8 Conical / M6	
TERMINAL TORQUE	See Terminal Configurations	
TEMPERATURE DATA		
OPERATION	-10°C to +45°C	14°F to 113°F
STORAGE	-20°C to +40°C	-4°F to 104°F
OPTIMAL	25°C ± 5°C	77°F ± 9°F


ELECTRICAL SPECIFICATIONS	
NOMINAL VOLTAGE	12 Volt
CAPACITY (30°C / 86°F)	
C0.5 at 10.2 V	40 Ah
C1 at 10.2 V	47 Ah
C3 at 10.2 V	57 Ah
C5 at 10.2 V	62 Ah
C10 at 10.2 V	65 Ah
C20 at 10.5 V	70 Ah
INTERNAL RESISTANCE (IEC 60896-21)	8.42 mΩ

BATTERY DIMENSIONS (shown in mm)

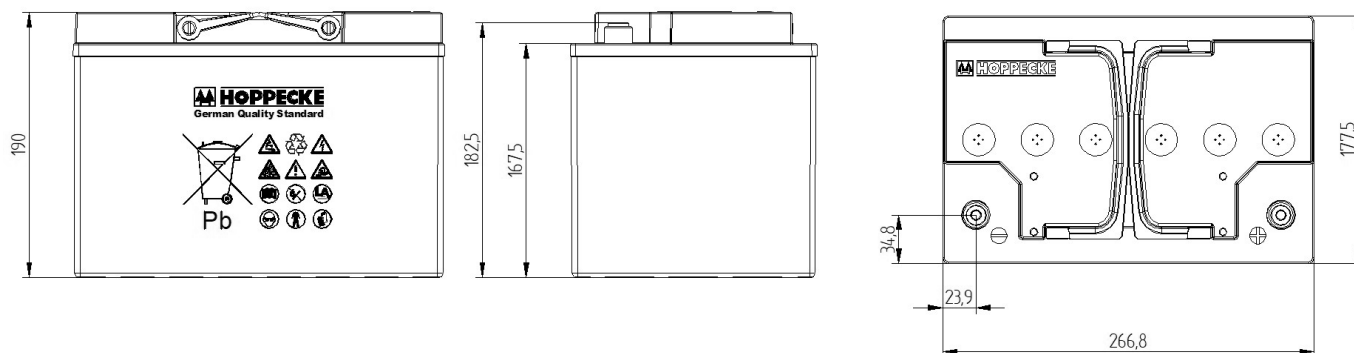


DISCHARGE PROFILE


Temperature: 30°C / 86°F

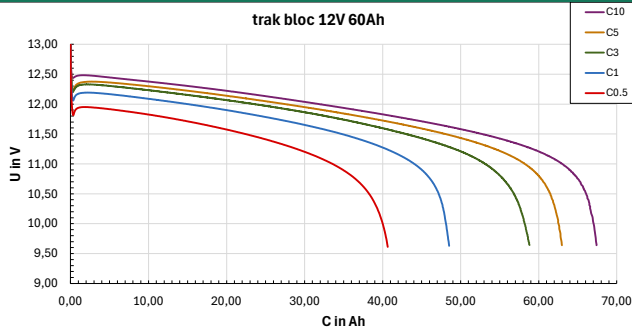


TEMPERATURE VS CAPACITY

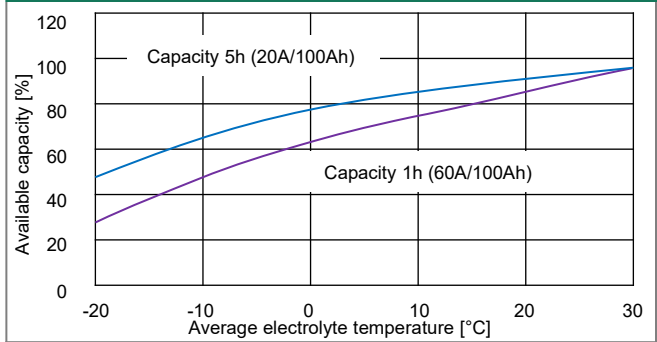

STORAGE TIME VS. TEMPERATURE

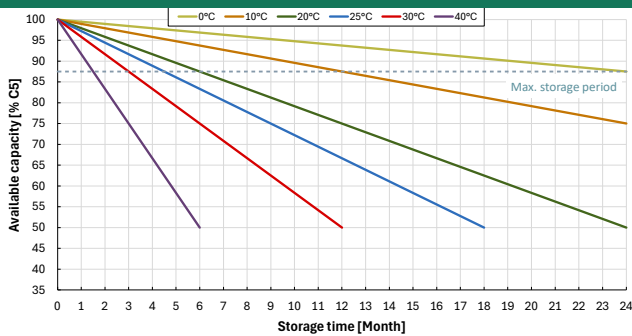

OPEN CIRCUIT VOLTAGE

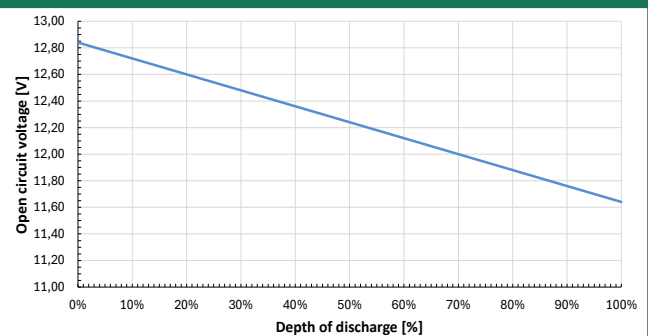

BASIC CHARGING INSTRUCTION

Reference temperature : 30°C / 86°F

Phase	Value	Switch condition	Note
Max. bulk charge current (I)	24 A (0.40 x C ₅)	Up to 2.40 V/cell	Please contact us for a detailed charging curve
Charge voltage (U-phase)	2.40 V/cell (14.4 V/block)	I < 0.48 A	
Post charge current (Ia-phase)	0.48 A	up to 2.60 V/cell (15.6 V/block) or 5 h whichever comes first	
Temperature correction +/- 3mV/K for IU/Ia curve at U phase, comparing to 30°C.			
Recommended charge factor: 1.08 (Ah returned/discharged)			
Float charge 2.25 V/cell (13.5 V/block)			

TERMINAL DIMENSIONS (shown in mm)

